

## TOP 2000 twin

### SECURITY WITHOUT COMPROMISE

Reliability and security without compromises with the safe-type lock. TOP range - four models single or double leaf - include doors with mechanical locking system controlled by euro-profile cylinder keys. This locking system is an exclusive Vighi Security Doors project. The deadbolts are self-locking and they are independent from one another, so if they are forced, they will not snap all together. In this way an attack on the lock will not pose a risk.

The twin version of TOP range is equipped with two locks - one controls the movement of the deadbolts placed along the door leaf, the other blocks the opening mechanism.



#### THE LOCK – ONE OF THE STRONGER PART OF VIGHI

Each component of the TOP range doors is designed to make the door secure and proof. The lock is absolutely a point of strength. The cylinder has a continuous motion until it stops. The deadbolts do not come out from the lock, but they are distributed along the bar of the leaf and are self-locking. Besides the defender (cylinder protector) has a particular shape that does not allow rotation when burglary is attempted. The features of thermal and acoustic insulation and the resistance to atmospheric agents are already excellent, but they can be enhanced with the corresponding performance kit.



# TOP 2000 twin

marking	anti burglary resistance	acoustic insulation	wind resistance	air permeability	thermal transmittance	water permeability
	<b>CLASS 3</b>	<b>41 dB</b>	<b>C 5</b>	<b>CLASS 4</b>	<b>UD 1,8</b>	<b>NPD</b>

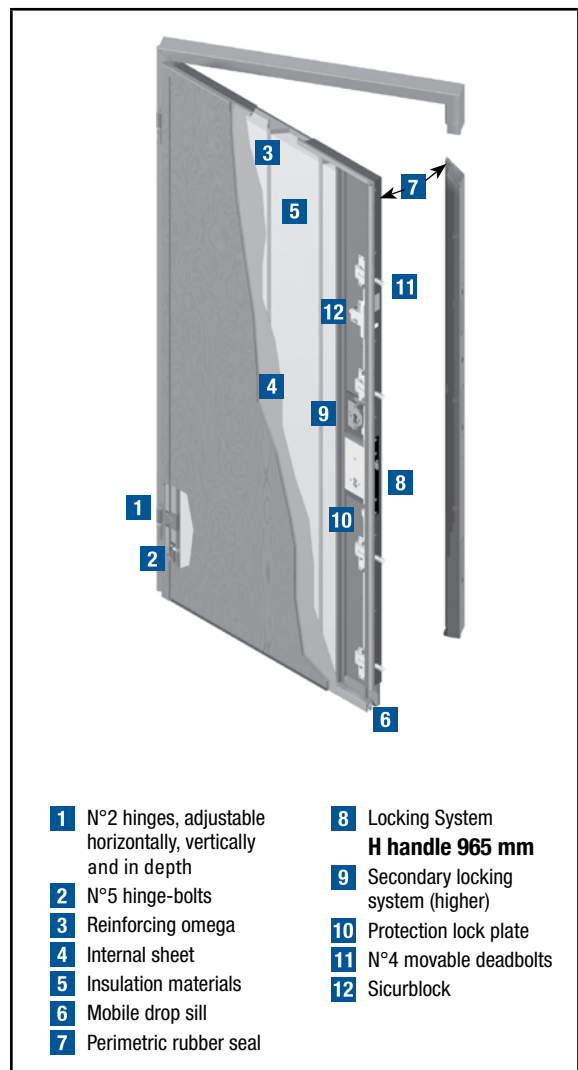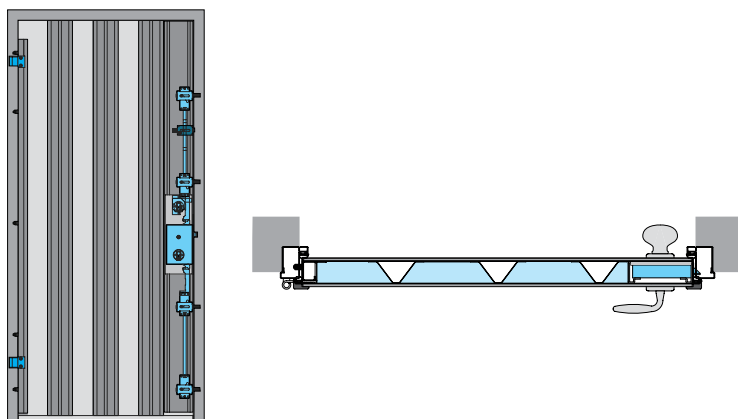

- 1** N°2 hinges, adjustable horizontally, vertically and in depth
- 2** N°5 hinge-bolts
- 3** Reinforcing omega
- 4** Internal sheet
- 5** Insulation materials
- 6** Mobile drop sill
- 7** Perimetric rubber seal
- 8** Locking System **H handle 965 mm**
- 9** Secondary locking system (higher)
- 10** Protection lock plate
- 11** N°4 movable deadbolts
- 12** Sicurblock

**Anti – burglary resistance test according to EN 1627:2011 norm - CLASS 3**  
Value also applicable on models with windows, or with fanlight/sidelight

external sheet	10/10 bent on all 4 sides
internal sheet	8/10 bent on 2 sides
reinforcing omega	n. 3
insulation materials	included
locking system	Vighi with antiburglary european cylinder, operating in continuous motion secondary locking system, blocking the first one
cylinder	Security cylinder with internal thumbturn, with 1 temporary red key (it cannot be duplicated) and 3 blue keys with protected profile sealed in a dedicated box. Second double security cylinder with double key, assembled in the higher locking system (master), with 1 temporary red key, and 3 black keys with protected profile (it cannot be duplicated), sealed in a dedicated box with the cylinder. CODE CARD-ownership one that guarantees against unauthorized duplication of keys.
movable deadbolts	n. 4
"sicurblock"	safety catch
lock protection	50/10 plate
hinges	n. 2 - adjustable horizontally, vertically and in depth
hinge-bolts	n. 5
perimetric rubber seal	on the frame and on the leaf
"securlock"	anti-drill and anti-wrench hardened steel defender for cylinder protection
spyhole	included
mobile drop sill	with acoustic insulation seal
"no air"	system against air passage

