

UNIX 3C service



Unix range, even if it has recently gain its place in the market, has already become a classic. It is manufactured with single sheet and offered in three different models: UNIX 3C, UNIX 3C service, UNIX 3DM. Two of them have a Euro cylinder lock, one – a double-bit key. The locks for these doors are manufactured by a partner company, including unique Vighi's modifications that are able to differentiate them substantially if compared to standard products, enhancing their anti-burglary resistance to intrusion.

The UNIX range doors have passed Class 3 anti-burglary resistance test according to the European norms. Safe and durable, they are offered with a euro-profile cylinder lock or a double-bit lock, with all the advantages of Vighi style.




UNIX 3C service

marking	anti burglary resistance	acoustic insulation	wind resistance	air permeability	thermal transmittance	water permeability
	CLASS 3	41 dB	C 5	CLASS 4	UD 1.6	NPD

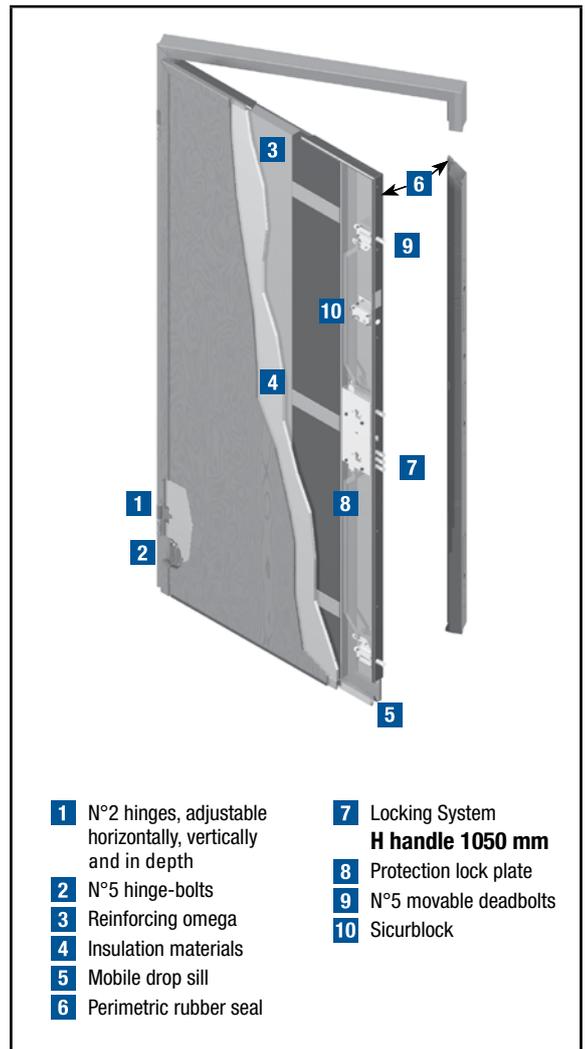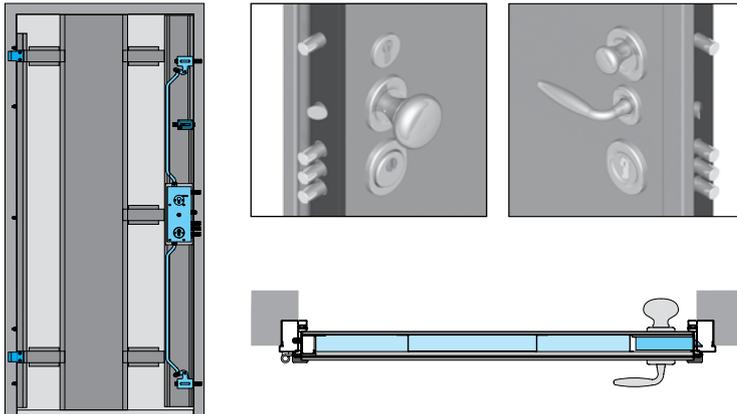

- 1** N°2 hinges, adjustable horizontally, vertically and in depth
- 2** N°5 hinge-bolts
- 3** Reinforcing omega
- 4** Insulation materials
- 5** Mobile drop sill
- 6** Perimetric rubber seal
- 7** Locking System
H handle 1050 mm
- 8** Protection lock plate
- 9** N°5 movable deadbolts
- 10** Sicurblock

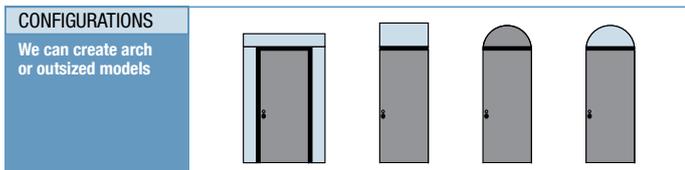

Anti - burglary resistance test according to EN 1627:2011 norm - CLASS 3
Value also applicable on models with fanlight/sidelight

external sheet	10/10 bent on all 4 sides
reinforcing omega	n. 1 vertical and n. 5 horizontal reinforcements of 10/10
insulation materials	included
locking system	european cylinder system, with 3 deadbolts and latch + service cylinder
cylinder	Key to key security cylinder, with 5 keys sealed in a dedicated box + 1 temporary key (it cannot be duplicated). Service cylinder with thumbturn and 4 keys. CODE CARD-ownership one to present in case of keys duplication request.
movable deadbolts	n. 5
"sicurblock"	safety catch
lock protection	40/10 plate
hinges	n. 2 - adjustable horizontally, vertically and in depth
hinge-bolts	n. 5
perimetric rubber seal	on the frame and on the leaf
"securlock"	anti-drill and anti-wrench hardened steel defender for cylinder protection
spyhole	included
mobile drop sill	with acoustic insulation seal
"no air"	system against air passage

