

UNIX 3DM



Unix range, even if it has recently gain its place in the market, has already become a classic. It is manufactured with single sheet and offered in three different models: UNIX 3C, UNIX 3C service, UNIX 3DM. Two of them have a Euro cylinder lock, one – a double-bit key. The locks for these doors are manufactured by a partner company, including unique Vighi's modifications that are able to differentiate them substantially if compared to standard products, enhancing their anti-burglary resistance to intrusion.

The UNIX range doors have passed Class 3 anti-burglary resistance test according to the European norms. Safe and durable, they are offered with a euro-profile cylinder lock or a double-bit lock, with all the advantages of Vighi style.



UNIX 3DM

| marking | anti burglary resistance | acoustic insulation | wind resistance | air permeability | thermal transmittance | water permeability |
|---------|--------------------------|---------------------|-----------------|------------------|-----------------------|--------------------|
| | | | | | | |
| | CLASS 3 | 41 dB | C 5 | CLASS 4 | UD 1.6 | NPD |

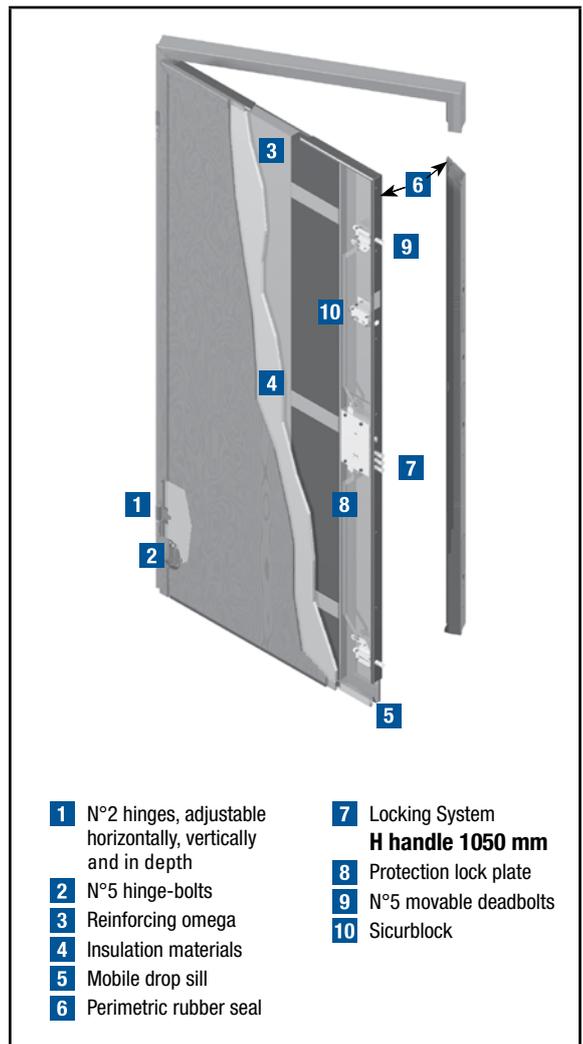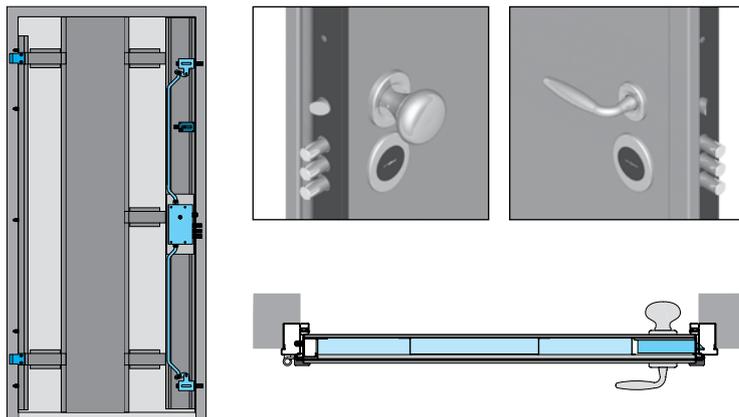

- 1** N°2 hinges, adjustable horizontally, vertically and in depth
- 2** N°5 hinge-bolts
- 3** Reinforcing omega
- 4** Insulation materials
- 5** Mobile drop sill
- 6** Perimetric rubber seal
- 7** Locking System **H handle 1050 mm**
- 8** Protection lock plate
- 9** N°5 movable deadbolts
- 10** Sicurblock

CONFIGURATIONS

We can create arch or outsized models

Anti - burglary resistance test according to EN 1627:2011 norm - CLASS 3
Value also applicable on models with fanlight/sidelight

| | |
|------------------------|--|
| external sheet | 10/10 bent on all 4 sides |
| reinforcing omega | n. 1 vertical and n. 5 horizontal reinforcements of 10/10 |
| insulation materials | included |
| locking system | double bit with 3 deadbolts and latch |
| closing system | n. 3 double bit keys sealed in a dedicated envelope + 1 temporary key (it cannot be duplicated). |
| movable deadbolts | n. 5 |
| "sicurblock" | safety catch |
| lock protection | 40/10 plate |
| hinges | n. 2 - adjustable horizontally, vertically and in depth |
| hinge-bolts | n. 5 |
| perimetric rubber seal | on the frame and on the leaf |
| "securlock" | excluded |
| spyhole | included |
| mobile drop sill | with acoustic insulation seal |
| "no air" | system against air passage |

